

CYLINDERS


BETEX NSLS series, flat cylinder, low height, spring return, single acting



Model: NSLS Series

Capacity : 5 - 150 ton
Stroke : 6 - 17 mm
Max. working pressure : 700 bar

- All cylinders are single acting with spring return.
- Pistons hard chromed.
- Cylinders inside roll-polished, outside blasted with black nitride coating.

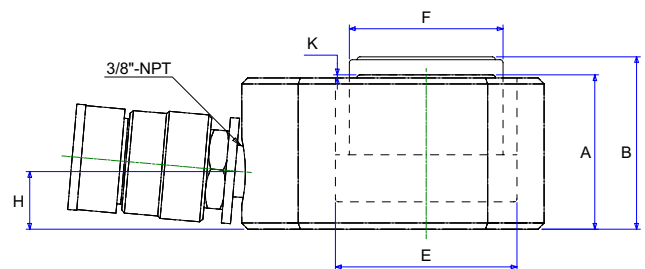

TIP! Use in combination with: hand- and foot pumps, page 55-67. Accessories, page 70-73

NSLS series

Type	Cap. ton	Stroke mm	Oil cap cm ³	A Height mm		C mm	D mm	E Ø mm	F Ø mm	G Ø mm	H mm	K mm	L mm	M mm	O Ø mm	P Ø mm	U mm	V Ø mm	Weight Kg
				Retracted	Extended														
NSLS50	5	6	4.5	33	39	28.5	58.5x44	31	25.4	9.5	16	1	22	22	-	-	-	5.3	1.0
NSLS100	10	12	18.0	42	54	36.5	82.5x60	44	38	11	19	1	30	34	-	-	-	7.5	1.4
NSLS200	20	12	34.0	51	63	49.3	100x78	60	50.8	15	19	1	39	39	-	-	-	10	3.1
NSLS300	30	13	54.0	58	71	52.3	117.5x95	73	63.5	16	19	2	47.5	47.5	-	-	-	10	4.5
NSLS500	50	16	113.0	66	82	66.5	145x115	95	70	19	19	2	57.5	58	-	-	-	11	6.8
NSLS750	75	16	180.0	79	95	76.2	170x145	120	82.5	20.5	19	2	72.5	70	-	-	-	13.5	11.3
NSLS1000	100	16	229.0	85	101	76.2	185x160	135	92	20.5	19	2	80	78	-	-	-	13.5	14.5
NSLS1500	150	17	363.0	100	117	117	225x195	165	115	20.5	23	2	97.5	85	-	-	-	13.5	26.3