


FOOT PUMPS

BETEX FHB SERIES, STEEL FOOT PUMPS, 700 BAR



- Max. working pressure: 700 bar.
- Large $\frac{3}{8}$ " pressure port for maximum flow.
- Betex® innovative foot pumps are not only attractively designed, but are also durable and stable
- Available as two-speed operation in forged steel construction. Low pedal effort for easy operation
- Foot-operated pump and release pedal, providing accurate control for operating in different conditions
- Spring-loaded foot pedal is convenient and easy to operate
- Automatic 700 bar overload-relief valve protects components in hydraulic systems and ensures safe operation

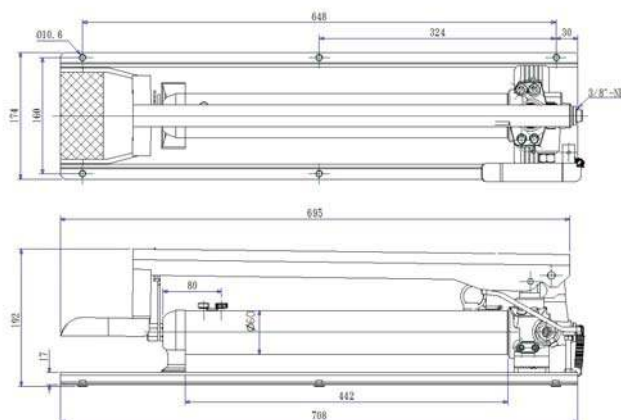

FHB series

TIP! Use in combination with accessories, page 70-74

Type	Pressure rating (bar)		Usable oil capacity cm ³	Oil volume per stroke cm ³		A mm	B mm	C mm	D mm	E mm	Output flow rate (cc)		Air cons.	F	Weight Kg
	1st stage	2nd stage		1st stage	2nd stage						Unload	Load			
FHB350	13.8	700	350	13.0	2.8	474	174	192	17	461	-	-	-	$\frac{3}{8}$ "-NPT	8.5
FHB600	13.8	600	600	13.0	2.8	660	174	192	17	647	-	-	-	$\frac{3}{8}$ "-NPT	10.8
FHB700	13.8	700	700	13.0	2.8	708	174	192	17	695	-	-	-	$\frac{3}{8}$ "-NPT	11.1